6. Exploded View & Parts List

6-1 CS21K10K2PXBWT

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

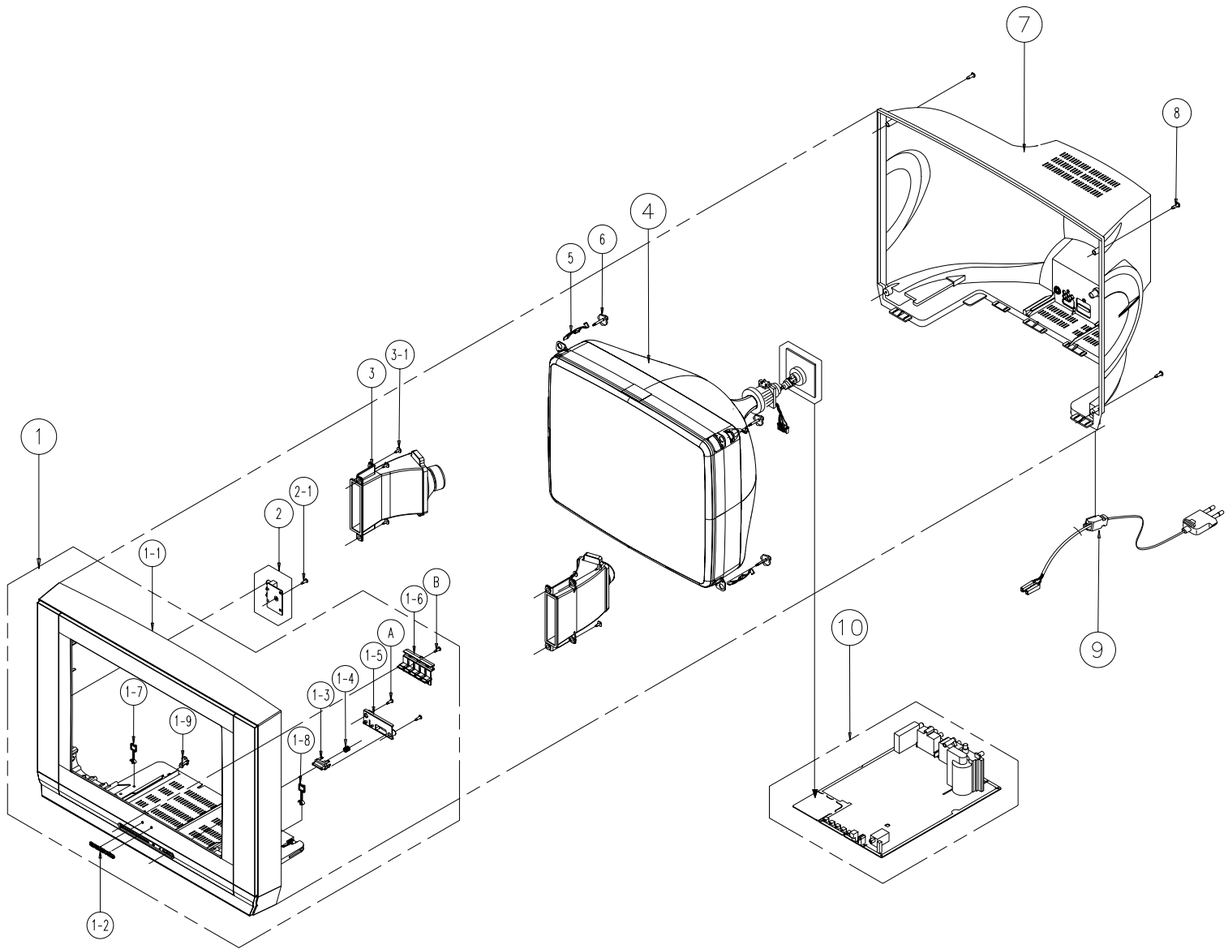

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01551F	ASSY COVER P-FRONT;21K10,CIS,HIPS HB,BLK		1	M0001	
1-1	AA64-03423F	CABINET FRONT;21K10(CIS),HIPS,HB,BLK,BK1		1	CIS3	S.N.A
1-2	AA64-70123A	BADGE-BRAND;NEW,AL,L50,FLAT,SILVER,SAMSU		1	T0057	S.N.A
1-3	AA64-03428B	KNOB POWER;21K10,ABS,HB,BLK,BK101P+W971		1	T0023	S.N.A
1-4	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	CIS7	S.N.A
1-5	AA64-03427A	WINDOW-RMC,LED;21K10(SDMA),PC,ACRYL,CLR		1	CIS	S.N.A
A	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		2	T0081	
1-6	AA64-03429B	KNOB CONTROL;21K10,ABS,HB,BLK,BK101P+W97		1	T0022	S.N.A
B	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	T0081	
1-7	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-8	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-9	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		S.N.A
2	AA95-03194A	ASSY SUB PCB-SIDE A/V;S56A,B-LOT		1	T0091	
2-1	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR		1	T0081	
3	AA96-01572A	ASSY SPEAKER P;8ohm,semidome,10W,AA91-00		1	CIS5	S.N.A
3-1	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)		8	SPK+CF	S.N.A
4	AA91-02169D	ASSY CPT;A51QDX992X,21,0MG,BARE,AA03-00		1		S.N.A
5	AA65-00009B	CLAMPER CORE-D,COIL;21A8,NYLON 66,V0,-,-		4	D-COIL	S.N.A
6	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-		4	SC016	S.N.A

6-2 CS25K10K2PXBWT

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

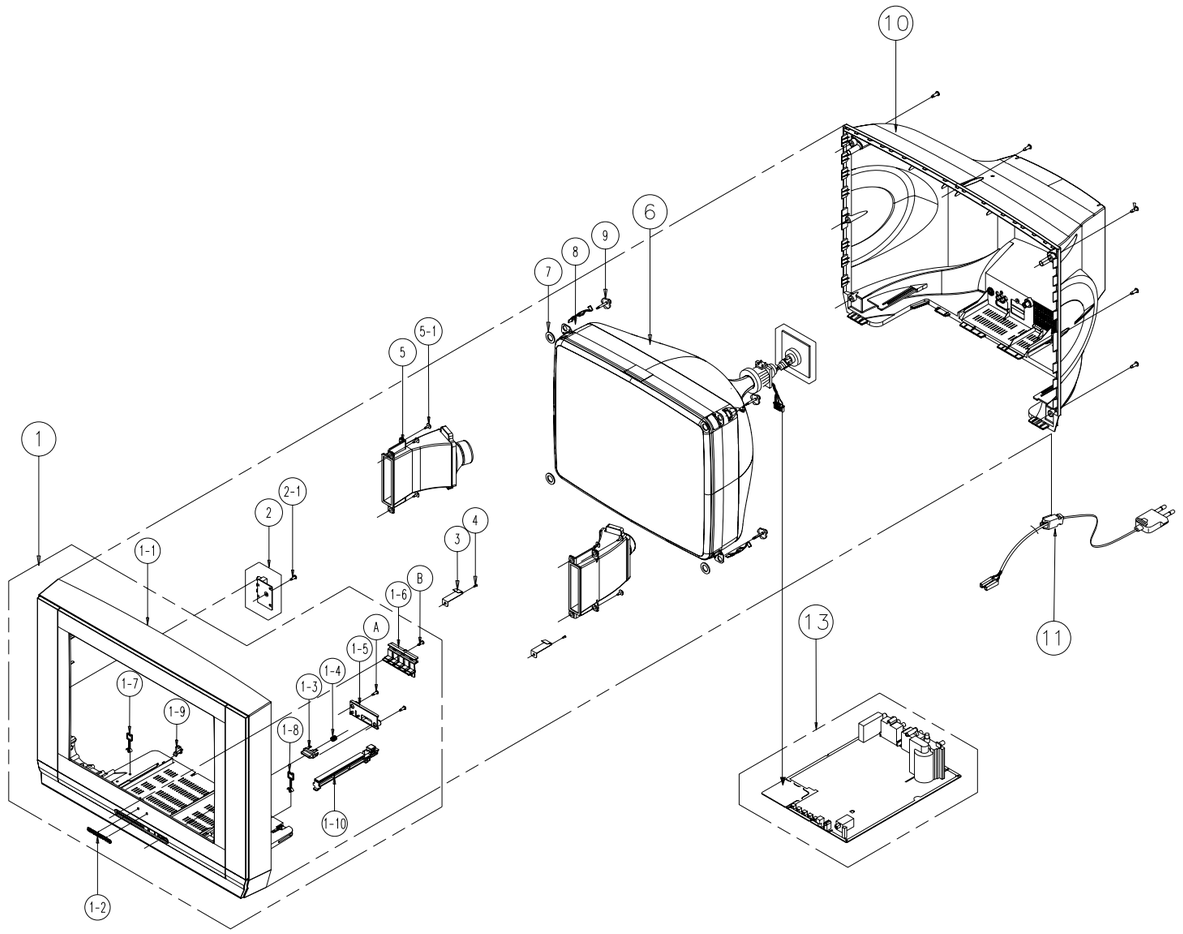

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01661D	ASSY COVER P-FRONT;25K10,HIPS HB,BLK,BK1		1	M0001	
1-1	AA64-03499D	CABINET FRONT;25K10(CIS),HIPS,HB,BLK,BK1		1	CIS3	S.N.A
1-2	AA64-70117B	BADGE-BRAND;,AL,T1.5,10.6,L65,BLK,SILVER		1	T0057	S.N.A
1-3	AA64-03428B	KNOB POWER;21K10,ABS,HB,BLK,BK101P+W971		1	T0023	S.N.A
1-4	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	CIS7	S.N.A
1-5	AA64-03427A	WINDOW-RMC,LED;21K10(SDMA),PC,ACRYL,CLR		1	CIS	S.N.A
A	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		2	T0081	
1-6	AA64-03429B	KNOB CONTROL;21K10,ABS,HB,BLK,BK101P+W97		1	T0022	S.N.A
B	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	T0081	
1-7	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-8	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-9	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		S.N.A
1-10	AA61-00711D	HOLDER-PCB;29U1,U2,HIPS VO,BK502(HB-PROP		1	T0245	S.N.A
2	AA95-03194A	ASSY SUB PCB-SIDE A/V;S56A,B-LOT		1	T0091	
2-1	6003-001268	SCREW-TAPTITE;TH,+,B,M4,L12,ZPC(YEL),SWR		1	T0081	
3	AA61-10053A	BRACKET-CRATER;7277,STS304,T0.5,-,-,-,-		2		S.N.A
4	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR		2	T0081	
5	AA96-01572A	ASSY SPEAKER P;8ohm,semidome,10W,AA91-00		1	CIS5	S.N.A
5-1	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)		4	SPK+CF	S.N.A
6	AA03-00322A	CRT COLOR;A59QDF891X999,+380MG,1.05MH,1.		1	T0063	
7	AA60-00055A	SPACER-GUM,CRT;ALL MODEL,NTR RUBBER,-,-,		4		S.N.A
8	AA65-00019A	CLAMPER CORE-D,COIL;25-34,NYLON 66,V2,N		4		S.N.A
9	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z		4	SC016	
10	AA64-03500D	CABINET BACK;25K10,HIPS,FV2,BK502		1	T0015	
11	AA96-20109C	ASSY POWER CORD;-,CP2/NO(4.0),H/C300,KKP		1	T0066	S.N.A